

DESCRIPTION

Thickness	EN ISO 24346 [EN 428]	5mm / 7mm
Weight	EN ISO 23997 [EN430]	5mm - 7.6KG m ² 7mm - 10KG m ²
Tile Dimensions	EN ISO 24342 [EN 427]	508mm x 508mm

CLASSIFICATION

Norm / Product specification	-	EN ISO 10582 [EN 6491]
European classification	EN ISO 10874 [EN 685]	34/43
Fire Class	EN 13 501-1	Bfl-s1
Electrical Resistance	IEC 61340-5-1:2007 EN 61340-5-1:2007	10 ⁻⁵ - 10 ⁻⁷ kV


PERFORMANCE

Wear resistance	EN 660.2	<3mm ³
Wear group	NF 189	Group T
Dimensional stability	EN ISO 23999-1 [EN 434]	<0.20 No Curling
Residual indentation	EN ISO 24343-1 [EN 433]	<0.05
Castor chair test (type W)	ISO 4918 [EN 425]	No Change
Shore hardness	EN ISO 868	>92 HA
Thermal conductivity	EN ISO 10456 [EN12524]	0.25 w/(m.K)
Colour fastness	EN 20 105 - B02	>6 degree
Slip Resistance	DIN 51130	R10
Chemical products resistance	EN ISO 26987 [EN 423]	OK

ENVIRONMENTAL ACCREDITATIONS

TVOC after 28 days	ISO 16000-6	<100 µg/m ³
Certification	-	Floorscore®

TECHNICAL ACCREDITATIONS

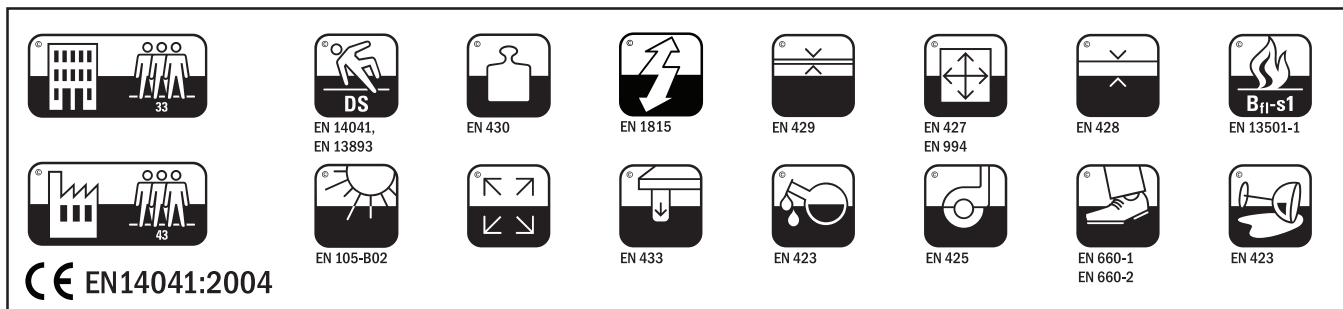

CE EN14041:2004

Recyclable

BRE-Green Guide Ratings A+

